


工序号：  
 机器型号 IPN-SG-23-02A-XXX  
 机器名称 拔肩门骨熨烫机  
 Mac.Name : Dressieren Draping

产量 productivity: 65 /hour  
 长度: 1300 mm 蒸气量: 18 kg/hour  
 宽度: 1350 mm 压缩空气量: 401 l/min.  
 高度: 1800 mm 抽真空量: 301 l/s

模具示意图

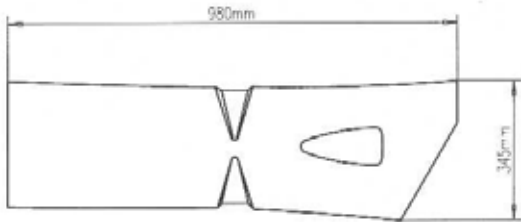

AVAILABLE SHAPE



Serial equipment:

- with shoulder blade and waist stamp
- both stamps are adjustable in the depth and switchable individually
- accurate body-fit shapes
- Microprocessor control, large display with chinese menu and graphic, able to store 30 pressing programmes for different fabrics, program for detection of machine faults, memory card can be used for data storage and transfer; bar code reader and central control network can be implemented additionally
- vertical movement of upper plate and accurate positioning(digital)
- continuously adjustable pressure control(digital)
- KD-Platte for upper plate
- Fix vacuum
- lower plate vacuum
- Blowing lower plate
- Steaming upper and lower plate

supplementary equipment(optional):

Proportional technique for steam and air in upper plate  
 Vacuum in lower plate adjustable

基本配置：

- 带肩部和腰部冲头
- 两个冲头深度均可调节，并可单独开关
- 精确的模具
- 新型微处理器控制、图象和中文菜单的高级屏幕显示、可储存30个不同面料的熨烫程序、自动检测机器故障程序、电脑磁卡用于资料传输和储存；可另配条形码读码器或中央控制网络
- 垂直的上模运动和精确的上模定位（数字式）
- 压力控制可无级调节（数字式）
- 用于上模的KD版
- 固定真空装置
- 下模抽真空
- 下模吹风
- 上模和下模吹蒸气

附加装置（可选择）：

- 电脑程序控制上模中的蒸气量和空气量的比例
- 下模抽真空量可调

522469	kd-plate 02a for head plate for fabrica with structrued siface	针布上模包布	1
273003	connecting material, 1/3000, insulated 3/8" x 3000mm	连接材料1条3000mm, 3/8"	1
100990	packing for pressing machine in wooden crate	包装	1