工序号:

机器型号 IPN-SGV-23-07G-0753

机器名称 外袖开缝熨烫机


Mac. Name: Opening and pre-pressing of back

sleeve seam

产量 productivity: 75 /hour

长度: 1900 mm蒸气量: 30 kg/hour宽度: 1750 mm压缩空气量: 70 I/min.高度: 2000 mm抽真空量: 110 I/s

模具示意图



Serial equipment:


- -bodyfit shapes for opening of both front and back seams -Microprocessor control, large display with chinese menu and graphic, able to store 30 pressing programes for different fabrics, program for detection of machine faults, memory card can be used for data storage and transfer; bar code reader and central control network can be implemented additionally
- -vertical head plate movement
- exact positional registration sensor controlled
- -precise positioning of the head plate under consideration of the plat weight

pressure controllable steplessly

- -Fix vacuum
- -Vacuum upper plate
- -Blowing lower plate(switchable by program or separate foot pedal)
- -steaming upper plate

supplementary equipment(optional):

- -Steam iron with safety iron rest
- -automatic blowing lower plate by taking of steam iron
- -Exterior steam suction(programmable)
- -Holding down frame

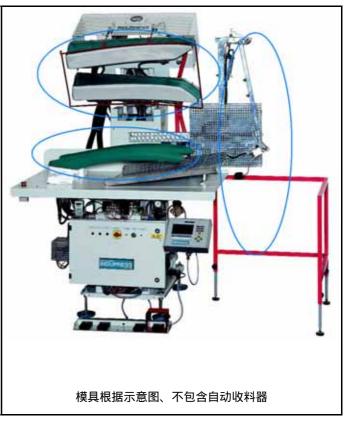

基本配置:

- 精确的模具,可开肘缝和前袖缝
- 新型微处理器控制、图象和中文菜单的高级屏幕显示、可储存30个不同面料的熨烫程序、自动检测机器故障程序、电脑磁卡用于资料传输和储存;可另配条形码读码器或中央控制网络
- 垂直的上模运动和精确的上模定位(数码)
- 精确的定位(数码)
- 压力控制可无级调节(数码)
- 固定真空装置
- 上模抽真空
- 下模吹蒸汽(可用程序和踏板开关独立控制)
- 上模吹蒸汽

附加装置(可选择):

- 带有安全熨斗架的蒸汽熨斗
- 拿起蒸汽熨斗后,下模自动吹风
- 在模具边缘设有抽蒸汽装置(可程序控制)
- 压紧框架

273003	connecting material, 1/3000, insulated 3/8" x 3000mm	连接材料1条3000mm, 3/8"	1
155014	EHDN-1700 high pressure electro SEAM-steam iron, incl. Teflon shoe,	EHDN-1700劈缝高压电子蒸汽熨斗	1
100990	packing for pressing machine in wooden crate	包装	1